

D3A

Professional Speaker Bracket (Ceiling & Wall Mount)




Features


- Suitable for suspension installation of small conference speakers less than 40kg.
- Can be adjusted in multiple angles in the vertical and horizontal directions.
- Made of metal materials, paint treatment for the surface.
- Its weight is 765g and can bear 40kg.

Installation


1. Assemble the hanger as shown in Figure 1.

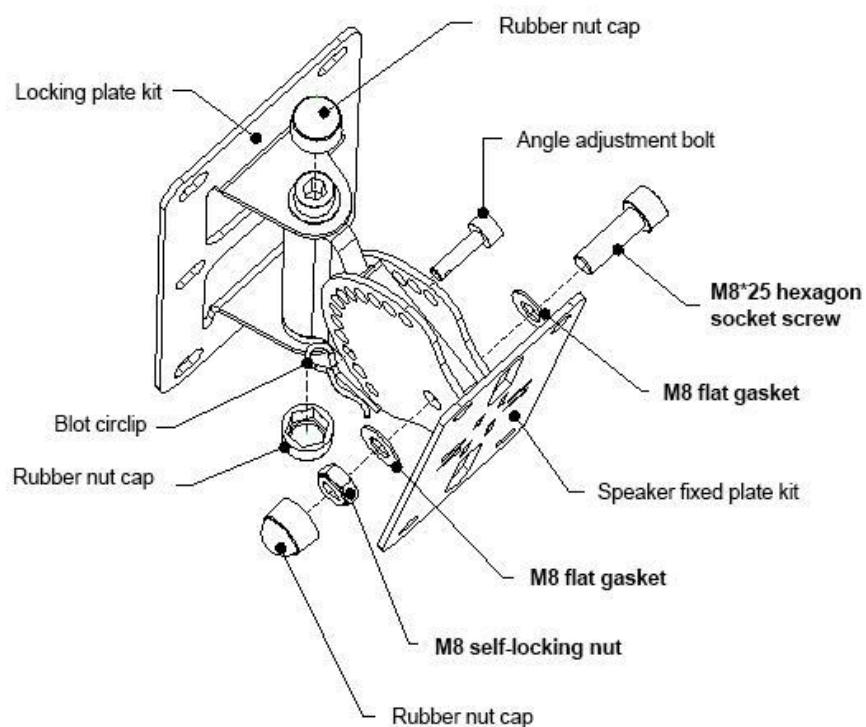

2. According to the size in Figure 2, choose a solid wall to install four M8 expansion bolts.

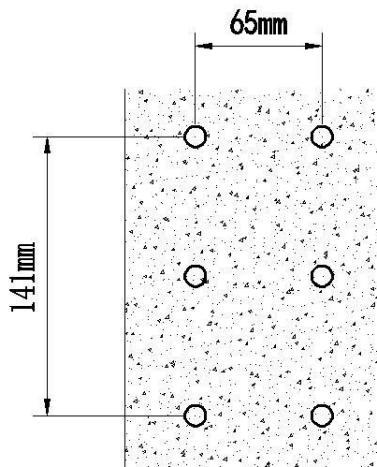

2. Connect and fix the speaker to be mounted with the hanger, and then lock it on the expansion bolts previously installed. According to needs, adjust the pitch and horizontal angle of the speaker; (Pull out and insert the angle adjustment bolt from B to adjust the pitch angle of the speaker. Remove the rubber nut cap from A, loosen and tighten the M8 self-locking nut appropriately, and turn the speaker left and right to adjust the horizontal angle of the speaker.)

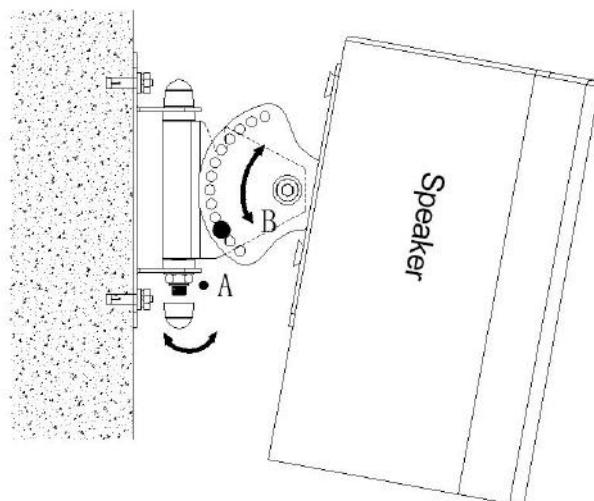

4. Finally, check and make sure that it is secure and firm.