



## Upper section 3m, Zinc + RCP 180 tower

3 m upper section for the erection of a 180 tower.

**Ref.** 3032

**Logical ref.** TOBER180

**EAN13** 8424450136577

### Other features

<b>Colour</b>	Grey
<b>Finishing</b>	Hot-Dip Galvanizing

### Packaging info

<b>Unit</b>	1 pcs.
-------------	--------

### Physical data

<b>Photo with dimensions</b>	3.00
<b>Net weight</b>	11,000.00 g
<b>Gross weight</b>	11,000.00 g
<b>Width</b>	225.00 mm
<b>Height</b>	3,010.00 mm
<b>Depth</b>	225.00 mm
<b>Main product weight</b>	11,019.00 g

### Highlights

- Anchoring system with union nuts
- Easy and quick mounting
- Fully automated soldering

- 180 tower maximum height: 26.5 m (as per calculation conditions)

## Main features


---

- Zinc coating + RCP
- Grey finish
- Mast max. diameter: 46 mm

## Mounting details

---

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

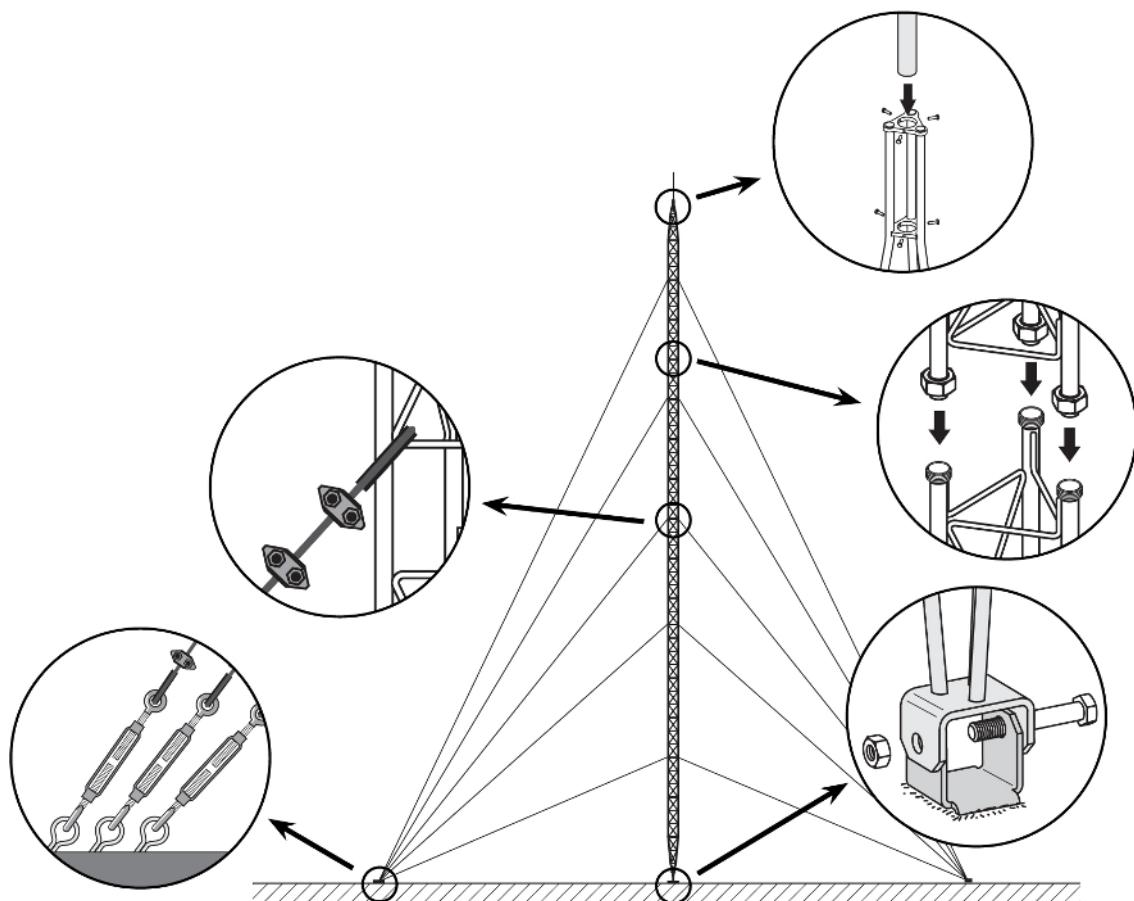

## Technical specifications : Ref. 3032

Surface facing the wind	m <sup>2</sup>	0.272
-------------------------	----------------	-------