


Dimensions (mm)

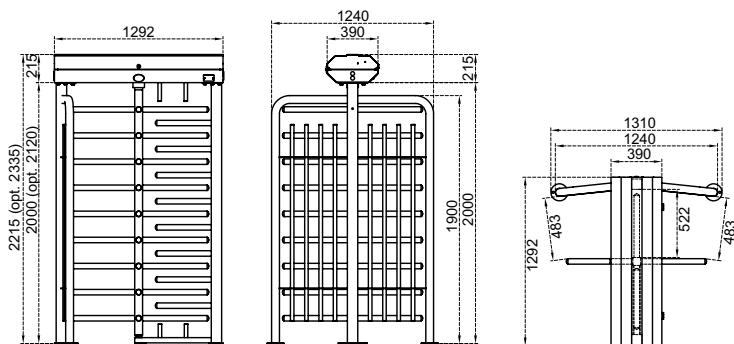

Technical Features

Place of Use	Indoors, outdoors												
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.												
Operating Intensity	100%, 7/24 use.												
Body / Arm Features	<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>Four-section rotor (90°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p> <p>Combination options with different material choices:</p> <table border="1"> <thead> <tr> <th></th> <th>BTX 400 N1</th> <th>BTX 400 N1-25</th> <th>BTX 400 N1-100</th> </tr> </thead> <tbody> <tr> <td>Body</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>304 grade (opt. 316 grade) stainless steel</td></tr> <tr> <td>Arms</td><td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td></tr> </tbody> </table> <p>(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).</p>		BTX 400 N1	BTX 400 N1-25	BTX 400 N1-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BTX 400 N1	BTX 400 N1-25	BTX 400 N1-100										
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel										
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.										

Indicators / Illumination	Status - Direction Indicators :   LED, standard/LED passageway illumination standard.							
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).</p>							
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch, IOS and/or android app.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>		Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled						
Single input both directions use	Entry - exit free							
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).							
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled), IOS and/or android app. Firmware can be updated. All past function updates and changes are kept in the server and records can be traced.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>							
Flow Rate	<p>Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min.</p> <p>Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>							
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.							
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.							
Weight	~175 kg							
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices.							